

INCUBATOR 10 ANALOG

INCUBATORS

Compact and budget-friendly analog benchtop incubator. It offers precise temperature control through a hydraulic thermostat. Perfect for various applications, this incubator optimizes your lab space while ensuring consistent and reliable results.

TECHNICAL SPECIFICATIONS



Model	Incubator 10 Analog
Temperature set range	ambient +5°C to 60°C
Controls	analog
Stability	±0,6°C at 37°C
Accuracy	±5°C
Capacity	10 liters
Shelves	2 positions, 1 shelf included
Display	analog scale
Max. power consumption	70 W
Chamber Dimension (H x W x D)	200 x 230 x 220 mm
Dimension (H x W x D)	335 x 285 x 280 mm
Crating	400 x 400 x 400 mm
Weight (Net/Crated)	8,3 / 9,2 kg
Permitted working ambient	temperature 2°C to 35°C, rh 75% non-condensing

ORDER INFORMATION

230 V, 50/60 Hz	Incubator 10 Analog
Code	780.400
Order ref.	273826
120 V, 50/60 Hz	Incubator 10 Analog 120 V
Code	1.780.400
Order ref.	273830

Additional shelf (for 10 liter incubator)

Code	780.1.060
Order ref.	195370
Shelf autoclavable	yes

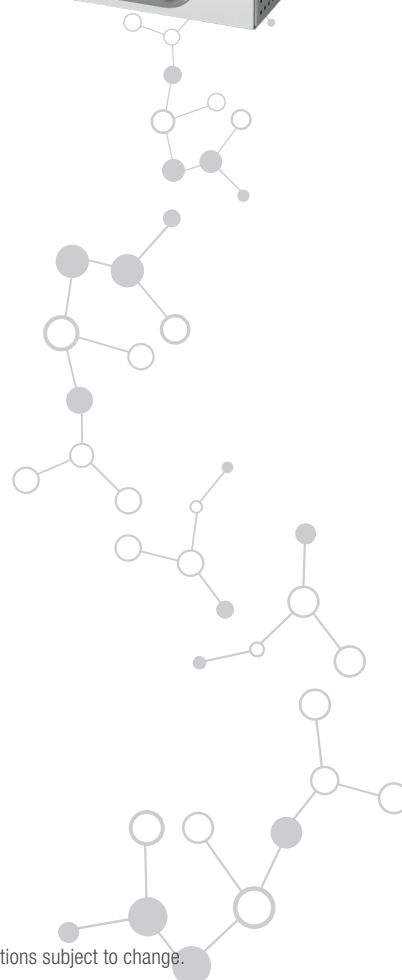

For more information visit Domel website: <https://labs.domel.com> / Technical specifications subject to change.

*The time may vary at different rotors, loads or voltage