

# DIGITAL INCUBATOR 10, 23, 56 L

## INCUBATORS

A versatile family of digital incubators with chamber volumes of 10, 23, and 56 liters. These compact and budget-friendly units boast a small footprint, making them ideal for space-conscious labs. With high accuracy, they ensure precise conditions for your valuable experiments.

### TECHNICAL SPECIFICATIONS

Model	Digital Incubator
Temperature set range	ambient +5°C to 70°C
Controls	digital PID regulation
Stability	±0,5°C at 37°C
Accuracy	±0,5°C
Capacity	10 or 23 or 56 liters
Shelves	10 l - 2 positions, 1 shelf included 23 l - 3 positions, 2 shelves included 56 l - 5 positions, 2 shelves included
Display	LED
Max. power consumption	10 l - 70 W 23 l - 160 W 56 l - 220 W
Chamber Dimension (H x W x D)	10 l - 200 x 230 x 220 mm 23 l - 290 x 290 x 270 mm 56 l - 390 x 360 x 400 mm
Dimension (H x W x D)	10 l - 335 x 285 x 280 mm 23 l - 340 x 360 x 400 mm 56 l - 453 x 420 x 546 mm
Crating	10 l - 400 x 400 x 400 mm 23 l - 400 x 400 x 450 mm 56 l - 600 x 500 x 650 mm
Weight (Net/Crated)	10 l - 8,3 / 9,2 kg 23 l - 12,8 / 14,5 kg 56 l - 23,6 / 27,0 kg
Permitted working ambient	temperature 2°C to 35°C, rh 75% non-condensing

### ORDER INFORMATION

230 V, 50/60 Hz	Incubator 10
Code	780.500
Order ref.	273929
120 V, 50/60 Hz	Incubator 10 120 V
Code	1.780.500
Order ref.	273931
230 V, 50/60 Hz	Incubator 23
Code	781.200
Order ref.	346693
230 V, 50/60 Hz	Incubator 56
Code	781.600
Order ref.	393720




Additional shelf (for 10 and 23 liter incubator)

Code	780.1.060
Order ref.	195370
Shelf autoclavable	yes



Additional shelf (for 56 liter incubator)

Code	781.1.560
Order ref.	377193
Shelf autoclavable	yes

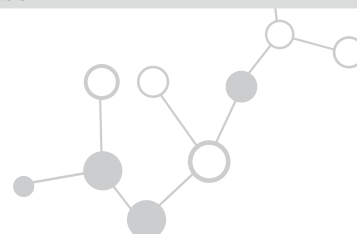

For more information visit Domel website: <https://labs.domel.com> / Technical specifications subject to change.

\*The time may vary at different rotors, loads or voltage

Available only outside EU